




Sovereign Gas Protection 2

Sovereign Gas Protection 2 is a multi-layer, low density polyethylene membrane.

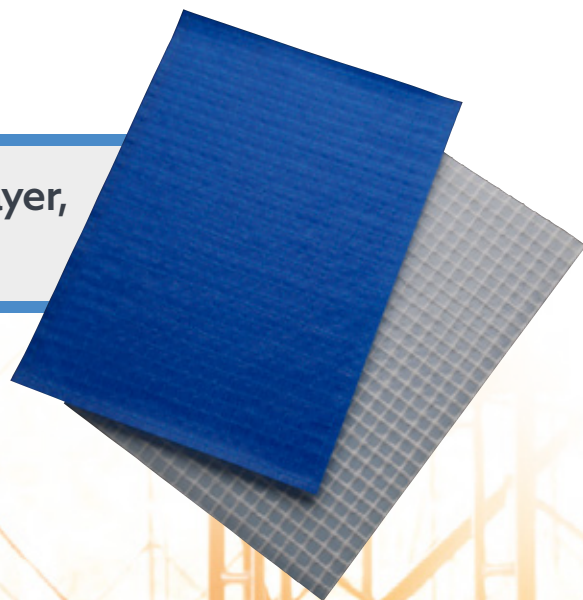

Product Code
30616386

Description

Sovereign Gas Protection 2 is a multi-layer, low density polyethylene membrane, reinforced with a polypropylene reinforcing grid. Sovereign Gas Protection 2 is specifically designed and manufactured to perform as a radon, air and moisture protection system, as well as low level protection to carbon dioxide and methane.

Compliance and Certification

CE Mark – EN13967:2012
NHBC Standards Compliant
BBA Certified – Certificate No. 12/4912(P2)

Handling

Roll weights can be in excess of 20 kg and hence appropriate care and equipment is required for unloading and handling.

Installation

Sovereign Gas Protection 2 should be installed in accordance with the product installation guidelines, and in accordance with BS 8485:2015.

Jointing and Sealing

It is recommended that Sovereign Gas Protection 2 be heat welded where possible, with welding carried out by a competent personnel with suitable qualifications. Sovereign Gas Protection 2 should be overlapped by at least 100mm. If taping joints, only suitable tape must be used. Ensure application with a silicone roller to remove trapped air.



TECHNICAL DATA

PHYSICAL PROPERTIES

Roll size	2.0 m x 50 m
Membrane thickness	0.5 mm
Material	LDPE (low density Polyethylene)
Colour:	Black

HYDRAULIC PROPERTIES

Resistance to water penetration:	Pass
Water tightness:	Pass
Resistance to static load:	20 kg
Tensile strength (MD):	500 N/50mm
Tensile strength (CMD):	470 N/50mm
Tensile elongation (MD):	15 %
Tensile elongation (CMD):	20 %
Puncture resistance:	1.04 kN
Resistance to tearing (MD):	400 N
Resistance to tearing (CMD):	350 N



Important Disclaimer

The information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that product, techniques and codes of practice are under constant review and changes occur without notice. Please ensure you have the latest updated information.

DURABILITY AND CHEMICAL RESISTANCE

GAS PERMEABILITY

Methane:	<514 ml/m ² /day/atm
Carbon dioxide:	<514 ml/m ² /day/atm
Radon:	4.3 x 10 ⁻¹² m ² /s

COVERAGE

1 roll covers 100 m²

Storage: Rolls should be stored on a stable ground and stacked no more than 5 rolls high. Rolls can be stored outside but shouldn't be exposed to UV light.

HEALTH & SAFETY

Product is not classified as hazardous.



Health & safety information available on request

ASSOCIATED PRODUCTS

- > 30616387 Sovereign Gas Protection Bond
- > 30616381 Sovereign Gas Protection Overtape
- > 30616384 Sovereign Gas Protection Edge Strip
- > 30616385 Sovereign Gas Protection Tank



Sovereign

the gold standard in building products

Sovereign Support: 01229 870800 | www.sovchem.co.uk

FIND US HERE

